



scara 1:10

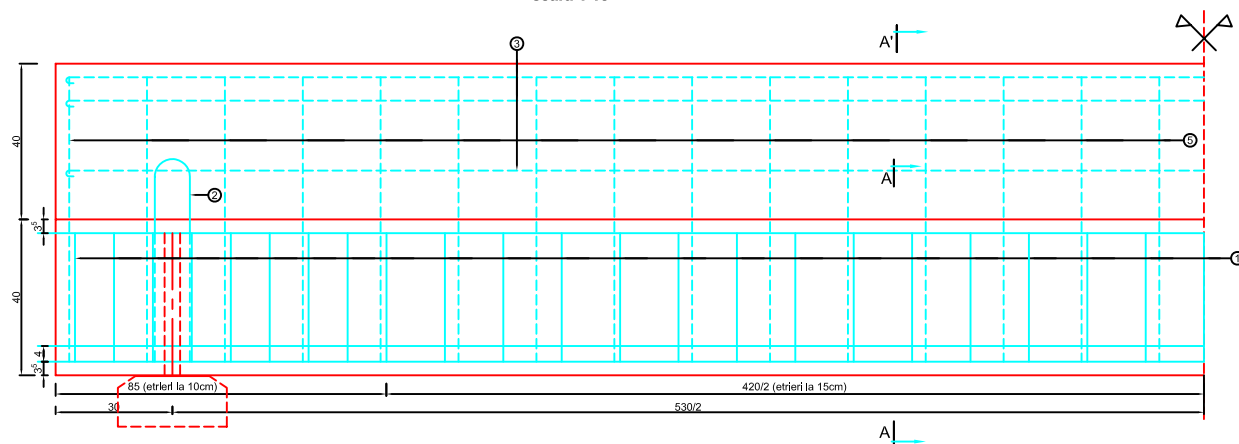

Notatii :
 RI = sir 1
 RII = sir 2
 RIII = sir 3
 TBP9 = toroane pentru befon precomprimat

FORTA TOTALA PE SECTIUNE	301t
EFORT DE CONTROL	
$\sigma_{sk} = 13\,500\text{kg/cm}^2$	$N_{sk} = 6,68/\text{toron}(\text{strand})$

CARACTERISTICI DALA			D5 L=5,3m
CURENTA	BETON C35/40	mc	1,84
	TBP9		108,8
	BSI500		110
	COFRAJ	mp	10,10
MARGINALA	GREUTATE	t	4,80
	BETON C35/40	mc	2,35
	TBP9		108,8
	BSI500		166
	COFRAJ	mp	15,8
	GRFUTATE	t	5,9

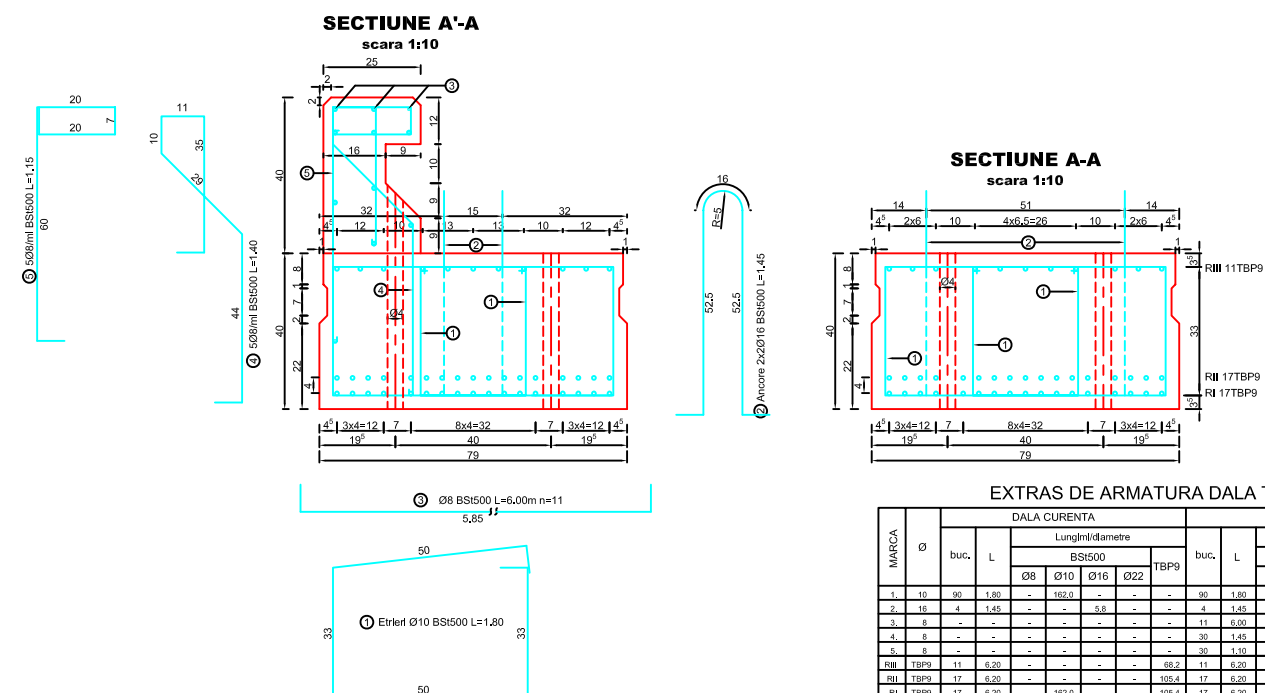

EXTRAS DE ARMATURA DALA TIP D5

MARCA	Ø	DALA CURENTA								DALA MARGINALA							
		buc.		L		Lungime/diametre				buc.		L		Lungime/diametre			
						BS1500								BS1500			
		Ø8	Ø10	Ø16	Ø22	Ø8	Ø10	Ø16	Ø22	Ø8	Ø10	Ø16	Ø22	Ø8	Ø10	Ø16	Ø22
1.	10	90	1.80	-	-	-	-	-	-	90	1.80	-	-	-	-	-	-
2.	16	4	1.45	-	-	-	5.8	-	-	11	1.45	-	-	-	5.8	-	-
3.	8	-	-	-	-	-	-	-	-	10	0.00	49.0	-	-	-	-	-
4.	6	-	-	-	-	-	-	-	-	30	1.45	43.5	-	-	-	-	-
5.	8	-	-	-	-	-	-	-	-	36	1.10	33.0	-	-	-	-	-
RELI TBP9	11	6.20	-	-	-	-	-	-	68.2	11	6.20	-	-	-	-	-	68.2
RELI TBP9	17	6.20	-	-	-	-	-	-	105.4	17	6.20	-	-	-	-	-	105.4
REI TBP9	17	6.20	-	-	-	-	-	-	105.4	17	6.20	-	-	-	-	-	105.4
DEFINITION	Ø	6.30	6.30	1.575	-	-	-	-	6.30	4	6.30	6.30	1.575	-	-	-	6.30
Ø8 - Ø16	Ø	-	-	-	102	6.30	-	-	-	36	102	6.30	-	-	-	-	102
Ø16 - Ø22	Ø	-	-	-	-	-	102	6.30	-	-	-	-	-	102	6.30	-	102